


# MONO 72 SOLAR LINE

30 YEARS  
LINEAR POWER  
WARRANTY

15 YEARS  
PRODUCT WARRANTY

## SCM-370

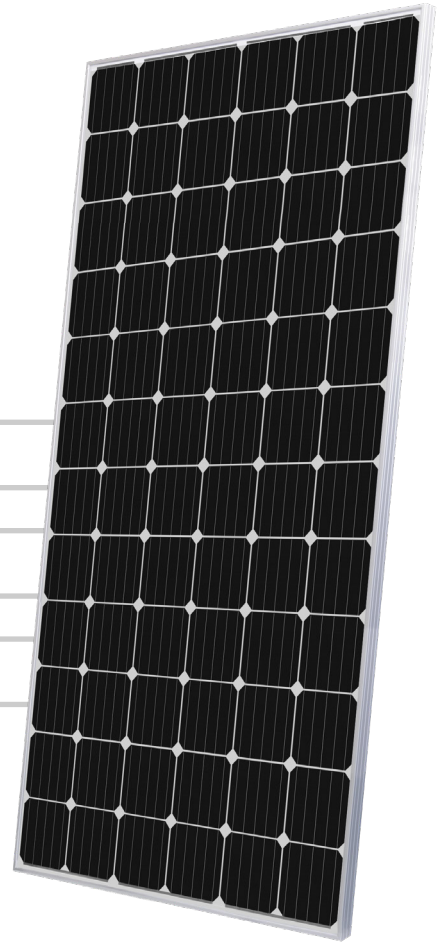

HAILSTORM RESISTANCE

ULTRA-LIGHT ALUMINUM FRAME

ANTI-REFLECTIVE GLASS



### PERC TECHNOLOGY

*Passivated Emitter and Rear Cell*

SOLAR CALL believes in technological innovation aimed at the continuous improvement of its products. Therefore we deploy PERC technology cells for our monocrystalline modules, which allow to achieve higher efficiency.

### MONOCRYSTALLINE SOLAR MODULE

You don't have enough room for your system, yet you don't want to compromise energy efficiency? SOLAR CALL is the right fit for you!

- High efficiency: with the dimensions of a 72cell solar module, these panels can reach an extremely high power output thanks to the use of high-efficiency cells.
- Captivating design: this monocrystalline solar panel has been designed to be elegant and sober, perfect for each kind of solar system.
- Maximum stability and strenght: we employ top-quality materials for our products, thus ensuring their long-lasting reliability and their stability in any environmental conditions.

72 CELLS

72

MONO

M

5 BUS BAR

5

SILVER  
FRAME



WHITE  
BACKSHEET



## ELECTRICAL CHARACTERISTICS (STC)\*

Nominal Output (Pmax)**	370 W
Flash Test Power Tolerance	0/+5 W
Voltage at Pmax (Vmp)	40.1V
Current at Pmax (Imp)	9.23 A
Open Circuit Voltage (Voc)**	48.93 V
Short Circuit Current (Isc)**	9.81 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	15 A
Module Efficiency	19.07%
Safety class	Class II

\*STC: (Standard Test Condition) Irradiance 1000W/m<sup>2</sup>; Module Temperature 25°C; Air Mass 1.5

\*\*Pmax, Voc, Isc measurement tolerance: ±3%

## SCM-370

## MECHANICAL CHARACTERISTICS

Solar Cells	72 (6 x 12) monocrystalline	Diodes	3 Bypass diodes serviceable
Solar Cells Size	156.75 x 156.75 mm / 6.17 x 6.17"	Junction Box	IP67 rated
Front Cover	3.2 mm / 0.12" thick, low iron tempered glass	Connector	MC4 or compatible connector
Back Cover	TPT (Tedlar-PET-Tedlar)	Cables Length	1100 mm / 43.31"
Encapsulant	EVA (Ethylene vinyl acetate)	Cables Section	4.0 mm <sup>2</sup> / 0.006 in <sup>2</sup>
Frame	Anodized aluminium alloy, double wall	Dimensions	1956 x 992 x 40 mm / 77 x 39 x 1.57"
Frame finishing	Silver	Weight	20.5 Kg / 45.19 lbs
Backsheet finishing	White	Max. Load (Test Load) - SF	5400 Pa - 1.5

## TEMPERATURE CHARACTERISTICS

Temperature Coefficient of Pmax	-0.37 %/°C	Operating Temperature	-40 °C ~ +85 °C
Temperature Coefficient of Voc	-0.28 %/°C	NMOT***	45±2 °C
Temperature Coefficient of Isc	0.042 %/°C		

\*\*\*NMOT: Nominal Module Operating Temperature: Sun 800W/m<sup>2</sup>; Air 20°C; Wind speed 1m/s


## PACKAGING

Pallet dimensions	2000 x 1200 x 1200 mm / 79 x 47 x 47"	Weight	622 Kg / 1371 lbs
Pieces per pallet	27	Pallets Stacked	2 pallets maximum


## CERTIFICATIONS

Fire resistance rating	1 (UNI 9177)
------------------------	--------------

## CURRENT/VOLTAGE CHARACTERISTICS

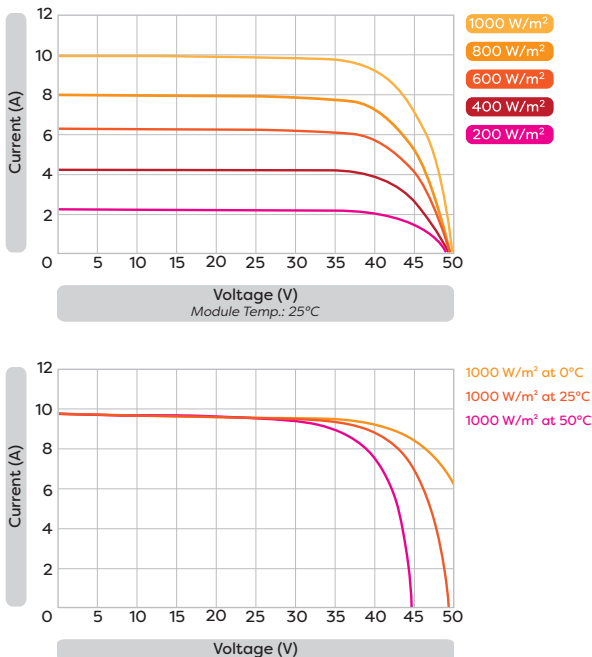

## DIMENSIONS

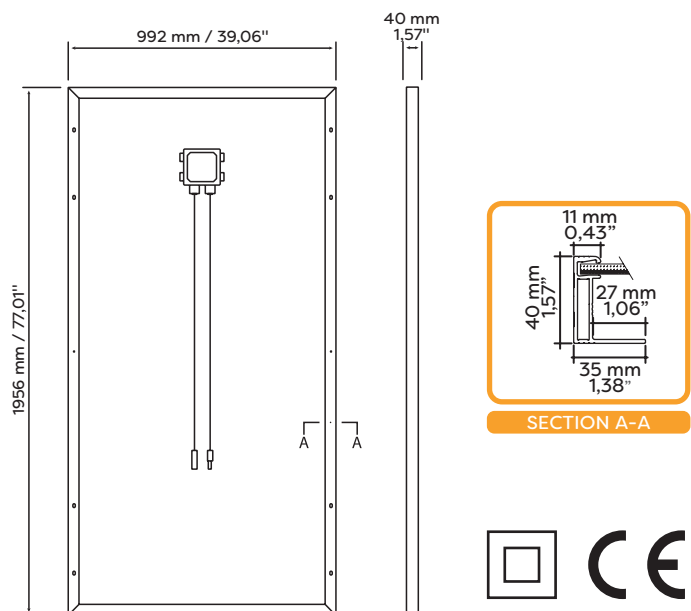

It is important to point out, that all technical specifications, information and figures contained in this datasheet are estimated values. We reserve the right to change the technical specifications, information and figures contained in this document at any time and without notice.

EN 11/2020 V01

**SOLARCALL**

info@solarcall.it • www.solarcall.it